


Prefi ACCOMODATIONAL CONTAINERS(UNITS) - TYPE A

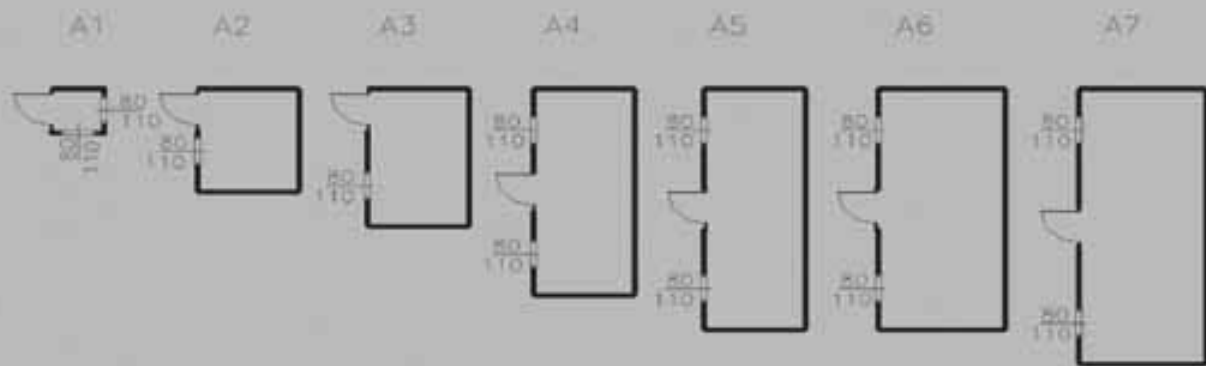

TYPES		A1	A2	A3	A4	A5	A6	A7
WIDTH	cm	130	240	240	240	240	300	300
LENGTH	cm	130	300	400	600	700	700	800
HEIGHT	cm	260	260	260	260	260	260	260
NET AREA		1,7	7,2	9,6	14,4	16,6	21	24
PRICE								

Prices can be change according to the heights.

TECHNICAL SPECIFICATIONS OF INSULATED MODULAR ACCOMMODATION STEEL CONTAINER

CHASSIS : Chassis are made of cold formed steel profiles.

ROOMS (DRY AREAS)

EXTERIOR WALLS : Composite prefabricated panel made up chipboard of 8 mm in thickness and 560 kg/m³ in density at inner face and 0.75 mm in thickness and 13 mm in depth hot dipped galvanized trapezoidal steel sheet at outer face.

Insulation : Glasswool or Styrofoam of 50 mm in thickness and 11 kg/m³ in density.

INTERIOR WALLS : Composite prefabricated panel made up chipboard of 8 mm in thickness and 560 kg/m³ in density at both faces.

Insulation : Glasswool or Styrofoam of 50 mm in thickness and 11 kg/m³ in density.

CEILING : Melamine coated chipboard of 8 mm in thickness.

Insulation : Roll glasswool of 5 cm in thickness.

FLOOR COVERING : Pvc roll of 2.5 mm in thickness with pvc skirting.

ROOMS (WET AREAS)

EXTERIOR WALLS : Composite prefabricated panel made up cement board of 8 mm in thickness at inner face and 0.75 mm in thickness and 13 mm in depth hot dipped galvanized trapezoidal steel sheet at outer face.

Insulation : Styrofoam of 40 mm in thickness and 11 kg/m³ in density.

INTERIOR WALLS : Composite prefabricated panel made up cement board of 8 mm in thickness at both faces.

Insulation : Styrofoam of 40 mm in thickness and 11 kg/m³ in density.

CEILING : Cement board of 8 mm in thickness.

Insulation : Roll glasswool of 5 cm in thickness.

FLOOR COVERING : Ceramic tile

ROOF COVERING : 0.55 mm in thickness and 27.5 mm in depth unpainted hot dipped galvanized trapezoidal steel sheet.

DOORS

Door Frames : Door frames are produced from 1.5 mm. thick cold formed steel profiles.

External Door Wing: 1.2 mm. thick custom-made steel sheet and glasswool insulation in between. Lock set and door handle will be provided.

Internal Door Wing : 4 mm thick plywood cladding and constructive honeycomb filling.

WINDOW : Windows are made of PVC. 4 mm. single frosted glazing is used for 600/400 mm window and 1100/800 mm window. Windows are supplied with complete accessories.

PAINT WORKS : All metal surfaces are covered with epoxy filler + synthetic semi-dull alkyd resin based (high filling properties and corrosion resistance) paint in factory.

ELECTRICAL INSTALLATION: Junction box, Switchboard, Cable, Lighting fixtures, Sockets, Phone plugs and phone sockets (Turkish type)

PLUMBING : Clean water pipes will be galvanized pipes and waste water pipes will be pvc.

Planning and Designing
Manufacturing and Mounting
Decoration When Need

The materials used are in TSE guarantee.

<http://www.PrefiPref.com>
e-mail: Prefi@PrefiPref.com